


CRL Bullet Resistant Protective Barrier Clamps

- Create Your Own Complete Barrier System With CRL Components
- Three Available Finishes: Brushed and Polished Stainless Steel, Plus Satin Chrome



CRL Protective Barrier Clamps are made to secure bullet resistant barrier systems in high-security applications. All clamps are made of high quality stainless steel to provide reliable security, and are available in a variety of finishes. Go to crlaurence.com/bullet-resistant for additional information.

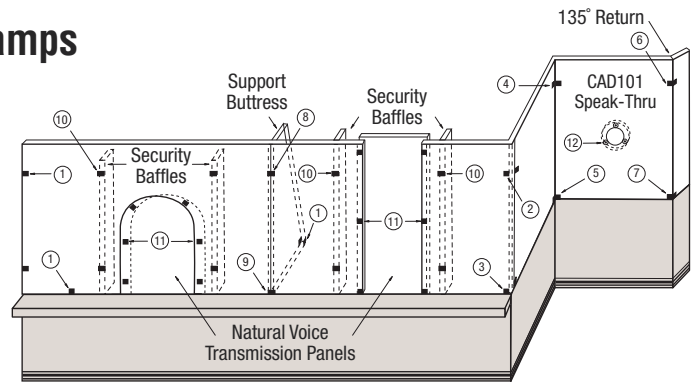

BARRIER CLAMPS

CAT. NO.*	DESCRIPTION	POSITION
PB001	U-Clamp	1
PB002	90 Degree Outside Top or Mid-Mount Clamp	2
PB003	90 Degree Outside Bottom Mount Clamp	3
PB004	90 Degree Inside Top or Mid-Mount Clamp	4
PB005	90 Degree Inside Bottom Mount Clamp	5
PB006	135 Degree Outside Top or Mid-Mount Clamp	6
PB007	135 Degree Outside Bottom Mount Clamp	7
PB008	Top or Mid-Mount T-Clamp	8
PB009	Bottom Mount T-Clamp	9
PB010	Buttress or Baffle Clamp	10
PB011	Surround Sound Spacer	11
CDS3S	Surround Sound Studs	12

Minimum order: 1 each. * Must specify finish code. Available finishes are Brushed Stainless, Polished Stainless, and Satin Chrome.





CRL Bullet Resistant Fiberglass Panels

- Protective Panels for Lining Doors and Walls

Bullet Resistant Fiberglass Panels are flat sheets of a polyester laminate reinforced with a fiberglass scrim to create a material with superior durability. They meet the standards of U.L. 752 Ballistic Performance Requirements Test, as well as all bullet resistant test requirements set forth by the National Institute of Justice.

Typical applications include the lining of bank teller counters, ticket booths, judge's benches, doors and walls of secure enclosures, and other structures. Cutting and drilling can be done using commonly available tools.

MORE INFORMATION
crlaurence.com



CAT. NO.	BULLET RESISTANCE*	PANEL THICKNESS	PANEL SIZE	PANEL WEIGHT	IMPACT VELOCITIES*
BRF100	1 M.P.S.A.	1/4" (6.3 mm)	96" x 48" (2.44 m x 1.22 m)	84 Lbs. (38 kg)	1250 Ft./Sec.
BRF200	2 H.P.S.A.	3/8" (9.5 mm)	96" x 48" (2.44 m x 1.22 m)	110 Lbs. (50 kg)	1395 Ft./Sec.
BRF300	3 S.P.S.A.	7/16" (11.1 mm)	96" x 48" (2.44 m x 1.22 m)	138 Lbs. (62 kg)	1470 Ft./Sec.

Minimum order: 1 each. * Levels per U.L. 752 Ballistic Performance Requirements Test Specifications. Must ship via common carrier. A Handling Charge will be added to orders of fewer than 3 combined sheets.

PROTECTION LEVELS*



CRL Clear Vision Bullet Resistant Speak-Thrus


- Disc Overlap Prevents Direct Entry of Projectiles While Allowing Natural Voice Transmission

Clear Vision Bullet Resistant Speak-Thrus are easy to install, and designed for use with bullet-resistant plastic glazing materials only. The space between the window and disc allows for clear voice transmission. Cat. No. CDS3S Studs Sets are also available for customers preferring to fabricate their own discs. Intended for interior use only.


CAT. NO.	DESCRIPTION	BULLET RESISTANCE
CAD101	10" x 1-1/4" (254 x 32 mm) Clear Acrylic Disc with Studs	Level 1
CLD103	10" x 1-1/4" (254 x 32 mm) Clear Lexgard® Disc with Studs	Level 3
CDS3S	Pack of Three Stud Sets Only	---

Minimum order: 1 each.

Lexgard is a registered trademark of G.A.A.G. LLC



INTERIOR USE

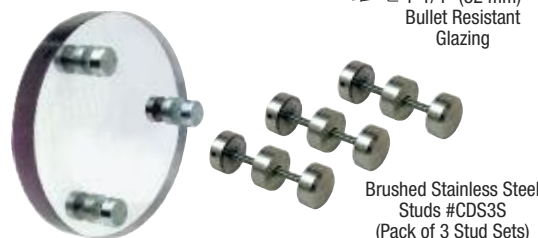

PROTECTION LEVELS



go to crlaurence.com to search for

bullet-resistant

Search

or enter the Catalog Number for complete product information

GG163

TOLL Phone: (800) 421-6144
FREE Fax: (800) 262-3299
From Anywhere in the U.S. or Canada

